

**4-Way cross, DN 40 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%**

# Cross piece


PFEIFFER 



Illustration only

**4-Way cross, DN 40 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%**

## Dimensions

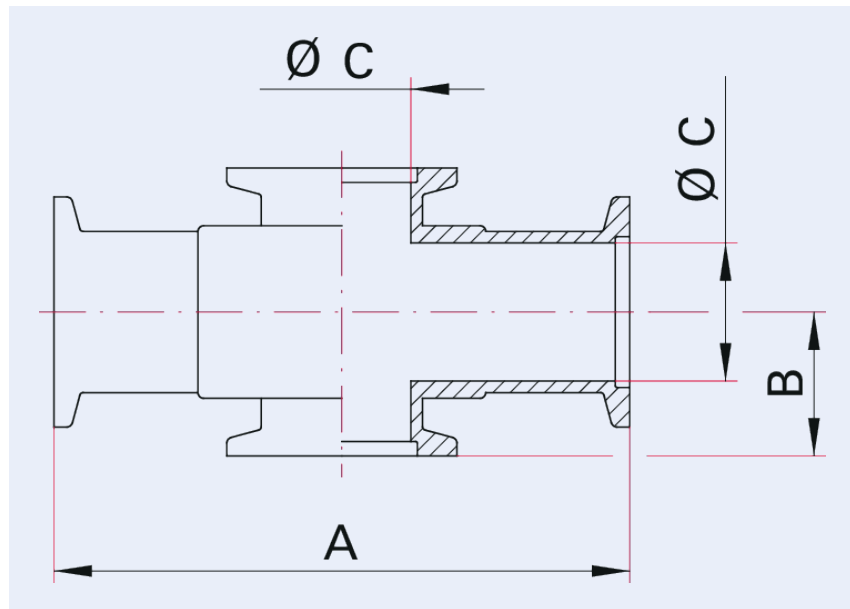

|   |        |
|---|--------|
| A | 130 mm |
| B | 35 mm  |
| C | 40 mm  |

| <b>Technical Data</b>           | <b>4-Way cross, DN 40 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%</b> |
|---------------------------------|--|
| Temperature range min.          | -196 °C  |
| Temperature range max.          | 150 °C   |
| Materials in contact with media | Aluminum   |
| Temperature range               | 196 – 150 °C   |
| Connection flange               | DN 40 ISO-KF   |
| Pressure range                  | $1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure           |
| Material                        | Aluminum   |
| Temperature range max.          | 150 °C   302 °F   423.15 K   |
| Temperature range min.          | 196 °C   320.8 °F   77.15 K  |

| <b>Order number</b>   | <b>4-Way cross, DN 40 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%</b> |
|---|--|
| 4-Way cross, DN 40 ISO-KF, aluminum EN AW 2011 Pb max. 0,4% | 110RKS040-V.A  |



Errors and/or changes excepted. - 2/24/2025

Are you looking for an optimum vacuum solution?  
Talk to us:  
Pfeiffer Vacuum Components & Solutions GmbH Germany  
T +49 551 99963-0  
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 