



**CCT 361, tube OD 1/2",
RS-485**




CCT 361



CCT 361, tube OD 1/2", RS-485

- Measurement range: 0.1 – 1100 hPa
- Pressure measurement independent of type of gas
- Minimal zero drift
- Precise temperature compensation
- Sensor in ceramic technology
- Calibration test report included in delivery

Dimensions

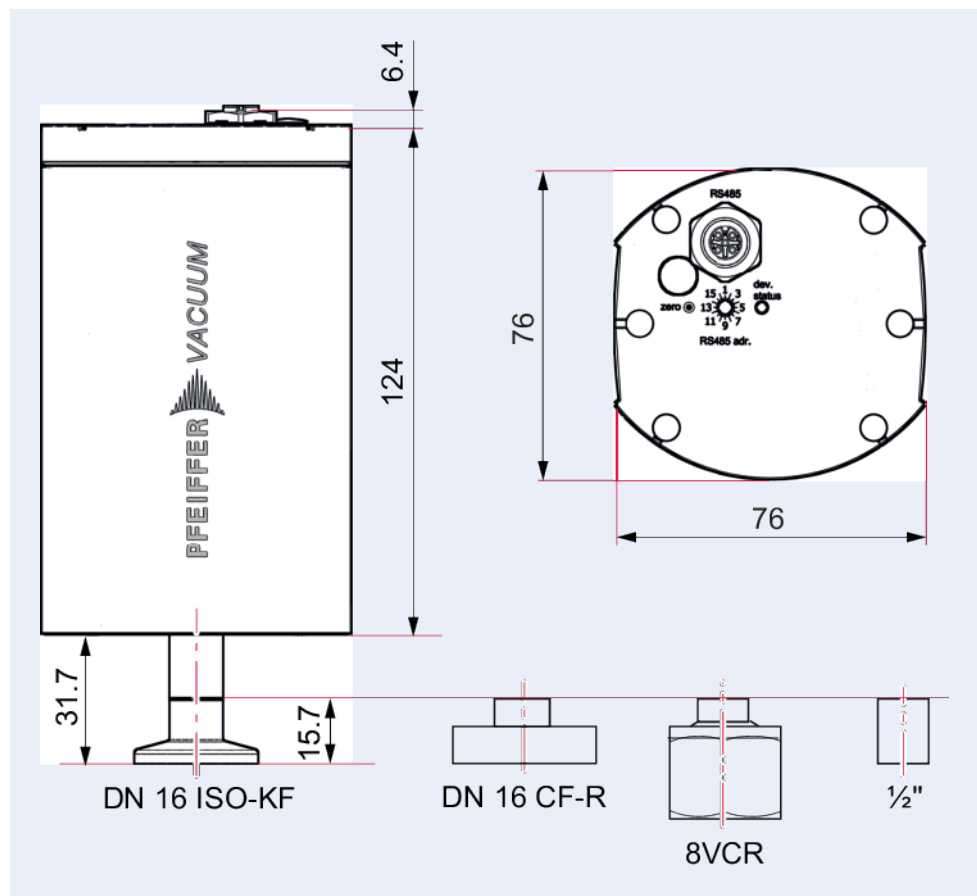

Technical Data	CCT 361, tube OD ½", RS-485
Measuring range	1E-1 – 1.1 · 10 ³ hPa
Materials in contact with media	Ceramic (Al ₂ O ₃ = 99.5 %) Stainless steel (AISI 316L)
Measurement cable length	100 m
Temperature effect: on zero point	0,005 % F.S./°C
Temperature effect: on range	0.01% of measured value/ °C
I/O interfaces	RS-485
Anode	130727
Ambient temperature	5 – 50 °C
Measuring method	Capacitive
Input voltage(s)	14 – 30 V DC
Bakeout temperature at the flange	≤110 °C ≤230 °F ≤383.15 K
Pressure max.	4,000 hPa 3,000 Torr 4,000 mbar
Full scale	1,000 hPa 750 Torr 1,000 mbar
Weight	0.62 kg 1.37 lb
Resolution	0.003 % F.S.
Measuring cycle	60 ms
Power consumption max.	2 W
Connection flange	Rohr AD ½"
Electrical connection	RS485, M12, 5-pole, socket, a-coded
Accuracy of measurement	0.2 % (of measured value)

Order number	CCT 361, tube OD ½", RS-485
CCT 361, tube OD ½", RS-485	PT R50 060

Your Success. Our Passion.

We give our best for you every day –
worldwide!

Are you looking for an optimum vacuum solution?

Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 11/15/2024

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER  **VACUUM**